


MLTG-360

TERRAGRAPH DISTRIBUTION NODE

INTRODUCTION

MLTG-360 is a Terragraph™ certified distribution node (DN). MLTG-360 has 4 radios, supporting 360° coverage. Each radio of MLTG-360 equipped with a 256-element beamforming phased array antenna, supporting up to 1.8 Gbps bi-directional throughput. In addition, MLTG-360 supports advanced mesh solution to establish a robust wireless network. Resilient mesh can be easily constructed between multiple MLTG-360 to construct the wireless network with high availability.

MLTG-360 provides fiber-like connectivity at a lower cost than fiber which is ideal for fixed wireless access, backhaul of Wi-Fi, or cellular networks.

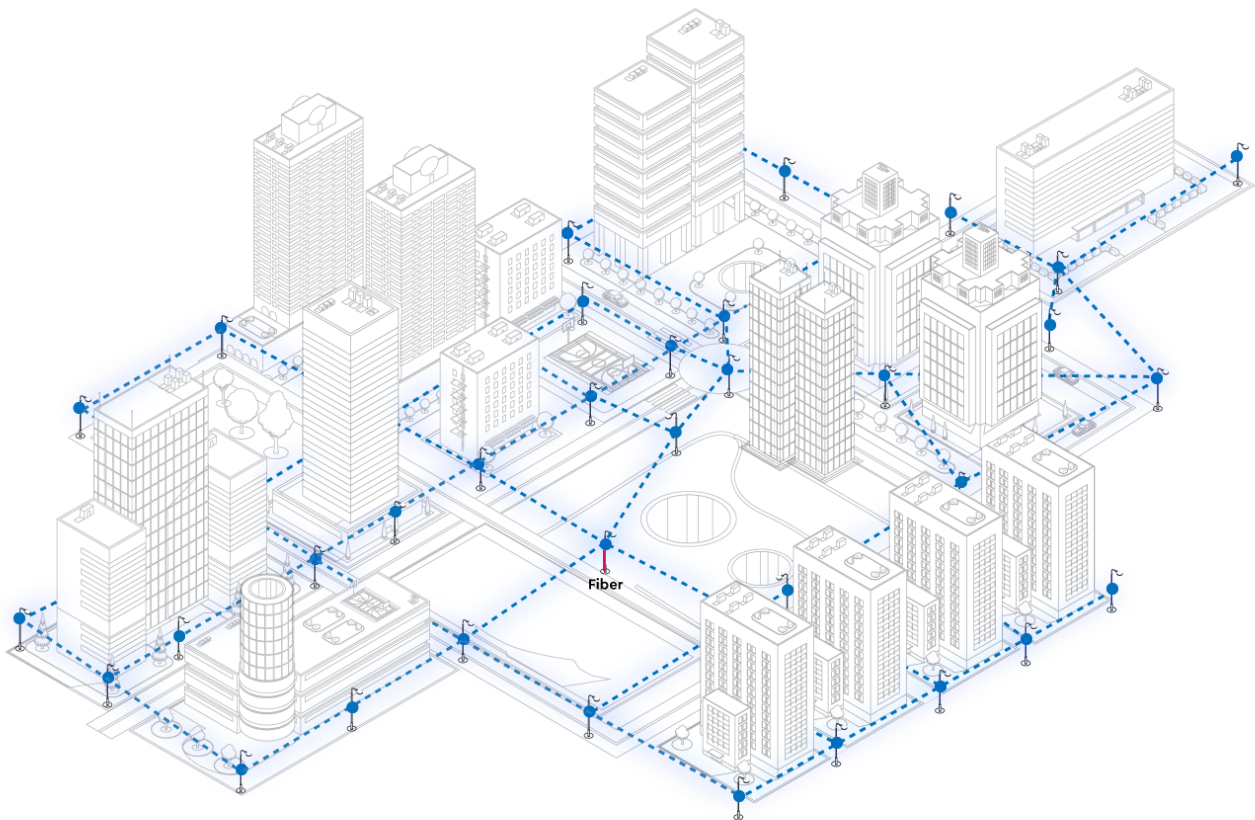

● MLTG-360 Distribution Nodes

SPECIFICATIONS

PHYSICAL	
Power	<ul style="list-style-type: none"> ♦ Passive PoE (Injector Optional) ♦ 42.5V~59V DC terminal block
Dimensions (L x W x H)	♦ 19.9 x 19.9 x 20.0 cm (7.83 x 7.83 x 7.87 in)
Weight	♦ 3.9 kg (with mount)
Interfaces	<ul style="list-style-type: none"> ♦ 1x Gigabit Ethernet Port (PoE IN) ♦ 1x 10 Gigabit SFP+ port ♦ 4x Gigabit Ethernet Port (PoE OUT)*1 ♦ 4x 60GHz Radio
Environmental Conditions	<ul style="list-style-type: none"> ♦ IP66 Rating ♦ Operating Temperature: -40°C (-40°F) to 55°C (131°F) ♦ Storage Temperature: -40°C (-40°F) to 85°C (185°F)
Antenna	<ul style="list-style-type: none"> ♦ Type: Built-in phased array antenna ♦ Gain: 28 dBi
Certifications	♦ FCC/CE

RADIO	
Standards	♦ 802.11ay/ad
60GHz Radio	<ul style="list-style-type: none"> ♦ 4 x antenna tiles per radio ♦ 64 antenna elements for each antenna tile ♦ 90 degrees azimuth scan range: -45° to 45° ♦ 50 degrees elevation scan range: -25° to 25°
RF Output Power*2	♦ Up to 43 dBm*3
Frequency Band	♦ 57-71GHz
Modulation	♦ OFDM, BPSK, QPSK, 16QAM

PERFORMANCE	
Range	<ul style="list-style-type: none"> ♦ Up to 300m for MCS9 ♦ Up to 200m for MCS12
RF Performance (RX)	<ul style="list-style-type: none"> ♦ -66 dBm @ MCS9 ♦ -61 dBm @ MCS12

KEY FEATURES	
Support channel 1 to channel 4 (57-66GHz)	
Up to 1.8 Gbps throughput in both direction for each radio	
Beamforming technology with phased array antenna for easy alignment	
Support TDMA-MAC for dynamic bandwidth allocation	
Support Over-the-Air (OTA) Security with AES128 encryption	
Mesh network with IPv6 routing	
Support QoS with 4 service classes	
Self-recovery & optimization	
Support Layer 2 Forwarding	
<ul style="list-style-type: none"> • Support VLAN transparent transmission • Support management VLAN 	

*1: Only DC-in power supply can enable PoE out function
*2: RF output power here stands for EIRP with antenna gain
*3: Maximum power is limited by local regulatory requirements

ORDERING INFORMATION

PART NUMBER	DESCRIPTION	POWER CONSUMPTION
MLTG-360	✦ Terragraph DN with 4 radios, 360° coverage	✦ 75W max.
MLTG-360-3	✦ Terragraph DN with 3 radios, 270° coverage	✦ 60W max.
MLTG-360-2P	✦ Terragraph DN with 2 radios (in parallel), 180° coverage	✦ 45W max.
MLTG-360-2R	✦ Terragraph DN with 2 radios (at right angle), 180° coverage	✦ 45W max.
MLTG-360-1	✦ Terragraph DN with 1 radio, 90° coverage	✦ 30W max.

ACCESSORY

PART NUMBER	DESCRIPTION
J-Bracket	✦ MLTG-360 Bracket, Pole mount
PoE Injector	✦ 90W PoE Injector* ✦ 60W PoE Injector

*: Required by MLTG-360